



CDN M4, 100 A from 150 kHz CDN IEC 61000-4-6

IEC/EN 61000-4-6 specifies the design and performance of a range of coupling / de-coupling networks (CDNs). Each CDN is specific to the type of cable and the intended signal carried on the cable. AMETEK CTS with its brand TESEQ offers an extensive range of CDNs that fully comply with the requirements of the standard and provide a simple and reliable method of injecting RF energy into the equipment under test (EUT). In this datasheet, CDN used with unscreened supply (mains) with four-line applications with maximum of 100 A starting from 150 kHz as required by IEC/EN 61000-4-6 is presented.

MAIN FEATURES

- **Coupling networks designed for IEC/EN 61000-4-6**
- **CDN M series for mains applications**
- **Models with frequency range 150 kHz to 80 MHz**
- **for 4 Lines application**
- **Models with terminal block**
- **with maximum current of 100 A**

The CDN M4 series is used to Inject common mode disturbance signal to supply lines for two-line applications (with netral and PE line) or for three lines applications (with either PE or N lines) in the frequency range from 150 kHz to 80 MHz.

Verification results are supplied with each unit. Traceable and accredited calibration according to ISO17025 are available upon request. The CDN can be ordered alone or as a kit, which includes the necessary adapters for verification. please refer to the set order information for more details.



For safety, AMETEK provides a protective earth bolt attached to the bottom plate of all CDN series which can be used to connect it with ground.

Typical performance with limit lines for common mode impedance and voltage division factor can be found in this datasheet.

Electrical Specifications

	CDN M4-100	CDN M4-100-3LN	CDN M4-100-3LN-750V	CDN M4-100-750V
Frequency Range	150 kHz to 80 MHz			
Connector EUT Port	Terminal block			
Connector AE Port				
Line Parameters	4 power lines			
Application Configuration	(2L+N+PE) (3L+PE)	(3L+N)		(2L+N+PE) (3L+PE)
AC max. voltage (L-N) / (L-L)	300 V / 520 V		750 V / 750 V according EN 60998-1 and 600 V / 600 V according UL 1059	
DC max. voltage (L-N) / (L-L)	400 V / 600 V		1000 V / 1000 V according EN 60998-1 and 850 V / 850 V according UL 1059	
Current Max	100 A (max. 60 min)		100 A (max. 45 min)	
Test Voltage, 2 sec.	3.1 kVDC		4.7 kVDC	
Common Mode Impedance (EUT Port)	150 kHz to 24 MHz: 150 Ω ±20 Ω 24 MHz to 80 MHz: 150 Ω +60 Ω/-45 Ω			

Typical Performance for Common Mode Impedance and Voltage Division Factor

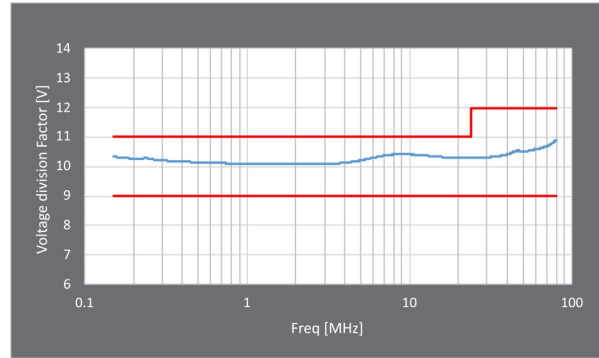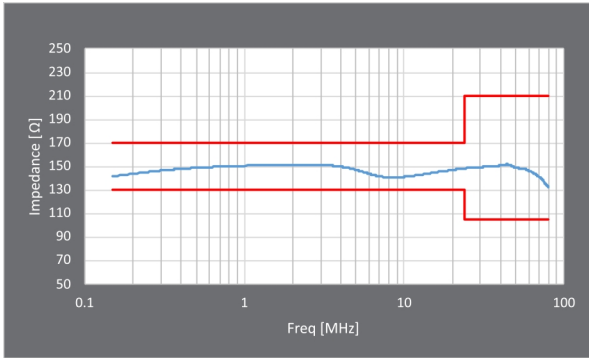

RF to EUT/AE Specifications

	CDN M4-100	CDN M4-100-3LN	CDN M4-100-3LN-750V	CDN M4-100-750V
RF Port	BNC 50 Ω			
RF Voltage	< 30 V ¹			
Voltage division factor (RF input to EUT port)	150 kHz to 24 MHz: 10 dB ±1 dB 24 MHz to 80 MHz: 10 dB +2 / -1 dB			
Insertion loss (EUT / AE)	f < 400 Hz: <0.1 dB			
CM decoupling (RF to AE)	150 kHz: >20 dB 1.5 MHz: >50 dB 30 MHz: >40 dB 80 MHz: >20 dB			
Footnote	¹ : Refers to 50 V test level in 300 Ω			

General Specifications

	CDN M4-100	CDN M4-100-3LN	CDN M4-100-3LN-750V	CDN M4-100-750V
Net Weight	approx. 11 kg			
Operating Environment	Indoor use only			
Operating Temperature	+5°C to +40°C			
Humidity	up to 80%			

Available Models

Product	Description	Item #
CDN M4-100	Coupling/Decoupling Network according IEC 61000-4-6 for Main 4 lines (2xL, N, PE), 100 A, and from 150 kHz to 80 MHz. (AE and EUT Banana)	257156
CDN M4-100-3LN	Coupling/Decoupling Network according IEC 61000-4-6 for Main 4 lines (3xL, N), 100 A, and from 150 kHz to 80 MHz. (AE and EUT Banana)	257158
CDN M4-100-3LN-750V	Coupling/Decoupling Network according IEC 61000-4-6 for Main 4 lines (3xL, N), 100 A, 750 VAC and from 150 kHz to 80 MHz. (AE and EUT Banana)	257170
CDN M4-100-750V	Coupling/Decoupling Network according IEC 61000-4-6 for Main 4 lines (2xL, N, PE), 100 A, 750 VAC and from 150 kHz to 80 MHz. (AE and EUT Banana)	257168

Set Information

	CAL U100M 257138	A 50-N 257521	SAR M116 239915	SAR M400M 257147	SAR MA41M 257140
CDN M4-100S 257157	2	1	1	1	1
CDN M4-100-3LNS 257159	2	1	1	-	2
CDN M4-100-750VS 257169	2	1	1	1	1
CDN M4-100-3LNS-750VS 257171	2	1	1	-	2

Product	Description	Item #
CDN-TC	Traceable calibration (ISO17025) for IEC 61000-4-6 requirements, order only with device CDN M, AF or S type	97-231024
CDN-DAkkS	DAkkS accredited calibration (ISO17025) for impedance and VDF in the frequency range of the CDN	98-231024
CAL U100X-TC	Traceable calibration (ISO17025), order only with CAL U100x device	97-247825
CAL U100XDAkkS	DAkkS accredited calibration (ISO17025), order only with CAL U100x device	98-247825
IMA U100M	Universal impedance measuring adapter (0 Ω)	257137